

KRISHNA™
The Brand for Excellence



KRISHNA

KRISHNA TISSUES PVT. LTD.
(Manufacturer of Coated Duplex Board)


SPECIFICATIONS

Production : Coated Duplex Board (Grey Back)

GSM Range : 200 - 500 GSM KRISHNA - 15

SUBSTANCE (GSM) T - 410	CALIPER (MICRON) T - 411	BULK (cc/gm) -	STIFFNESS (TABER) gm.cm. T - 489	
			MD	CD
200	244	1.22	42.5	13
230	283	1.23	55	20
250	307	1.23	85	30
260	325	1.25	95	33
285	365	1.28	115	45
300	390	1.30	130	52
320	416	1.30	150	55
350	455	1.30	185	65
370	481	1.30	210	80
400	520	1.30	260	100
450	585	1.30	320	125
500	650	1.30	370	150
Tolerance ± 5%	± 5%	±5%	± 10%	

PARAMETERS	UNITS	VALUE
BRIGHTNESS T - 452	%	79 ± 1
SMOOTHNESS Bendesten (Top) T - 535	ml/min	60 - 250
GLOSS AT 75% T - 480	%	45 ± 5
B.F. (MIN) T - 807	-	200 - 300 GSM = 18 310 - 500 GSM = 16
S. O. A (MIN) PATRA	Secs.	500
COBB (MAX) T - 441	g/m ²	TOP = 50 BACK = 60
MOISTURE T - 412	%	200 - 300 GSM = 7 ± 1 310 - 500 GSM = 8 ± 1
SURFACE pH T - 529	-	6.0 - 6.5

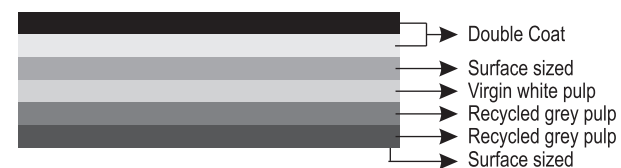

APPLICATIONS

- HIGH SPEED PRINTING JOB
- PACKAGING BOARD

RECOMMENDED FOR MULTI COLOUR PRINTING ON :

1. LETTER PRESS
2. OFF SET
3. ROTO GRAVURE

Note : Specifications are subject to change without any prior notice.



100% recycle
we are committed
to **NATURE**

Printed on KRISHNA 15 Coated Duplex Board Grey Back 300 gsm